

FIG. 1

	START-UP TIME	HARDWARE VOLUME	PROGRAM CAPACITY	CONFIGURATION TIMING
CPU	SLOW (COMMAND FETCH NEEDED)	EXISTING HARDWARE	NEEDED	AFTER RESET
DMAC	MEDIUM (SETUP BY CPU NEEDED)	EXISTING HARDWARE	NEEDED	AFTER RESET
CONFIGURATION CIRCUIT	FAST (SETUP NO-NEED)	EXCLUSIVE HARDWARE	NO-NEED	DURING RESET OR AFTER RESET

FIG. 2

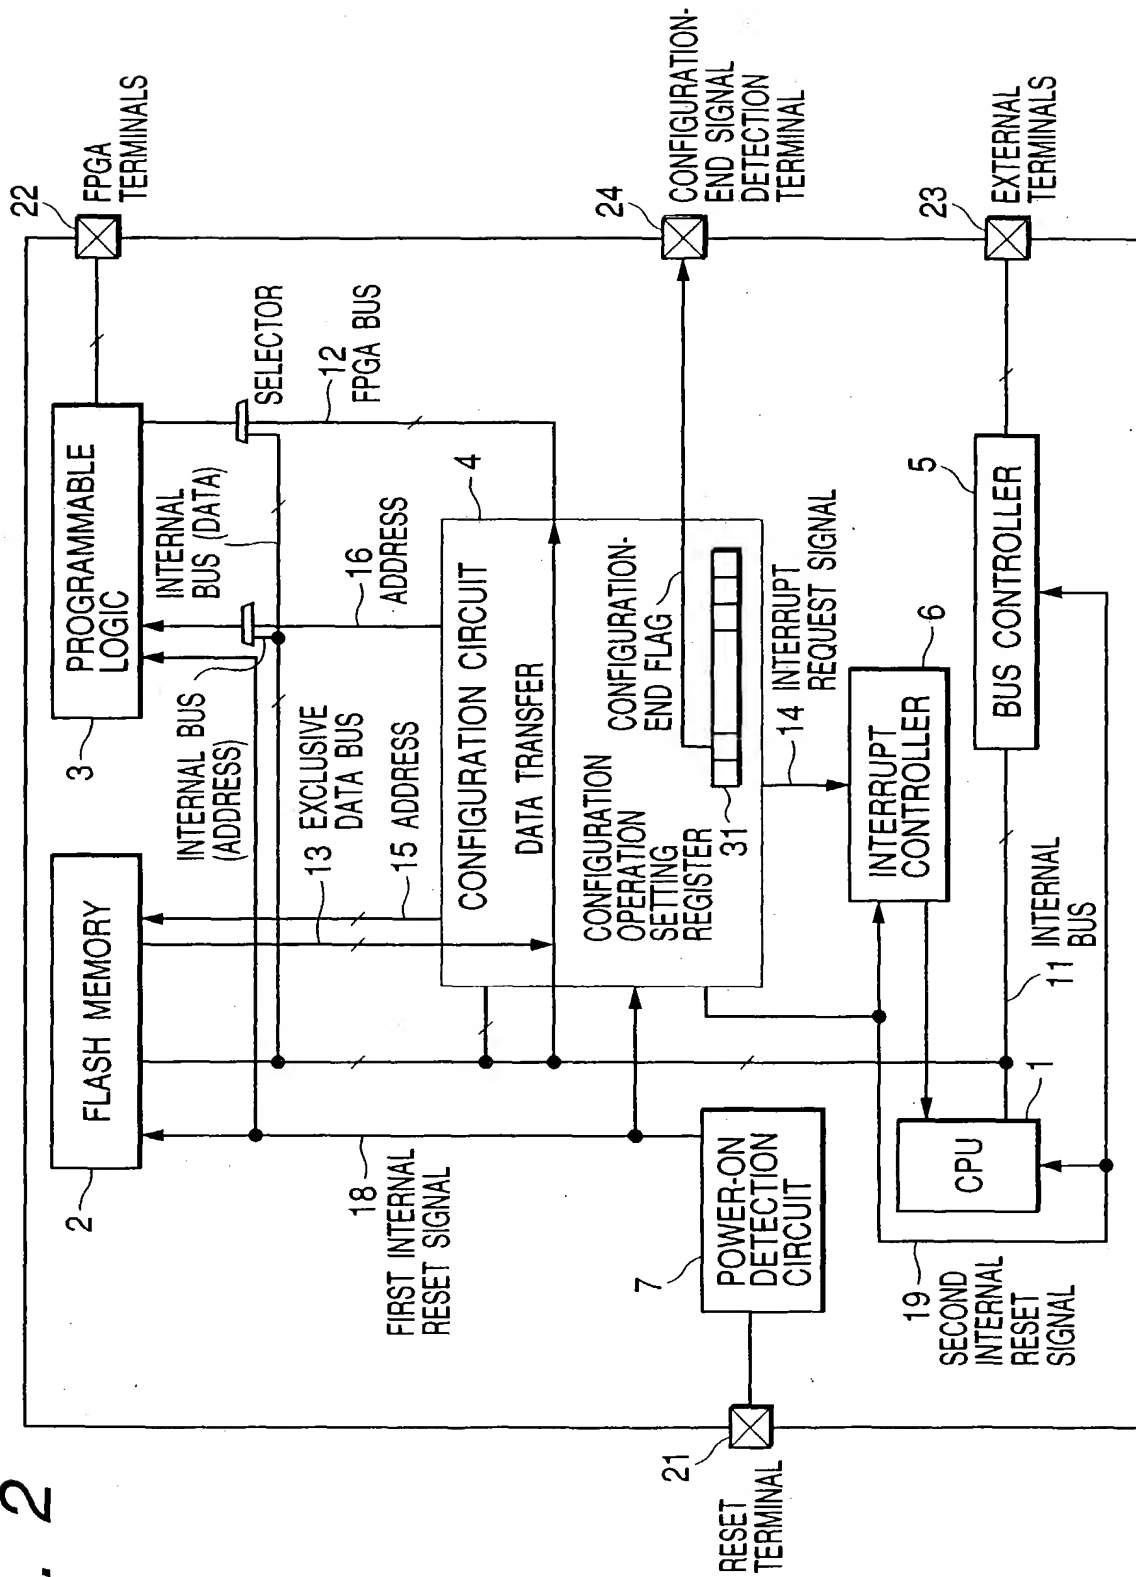


FIG. 3

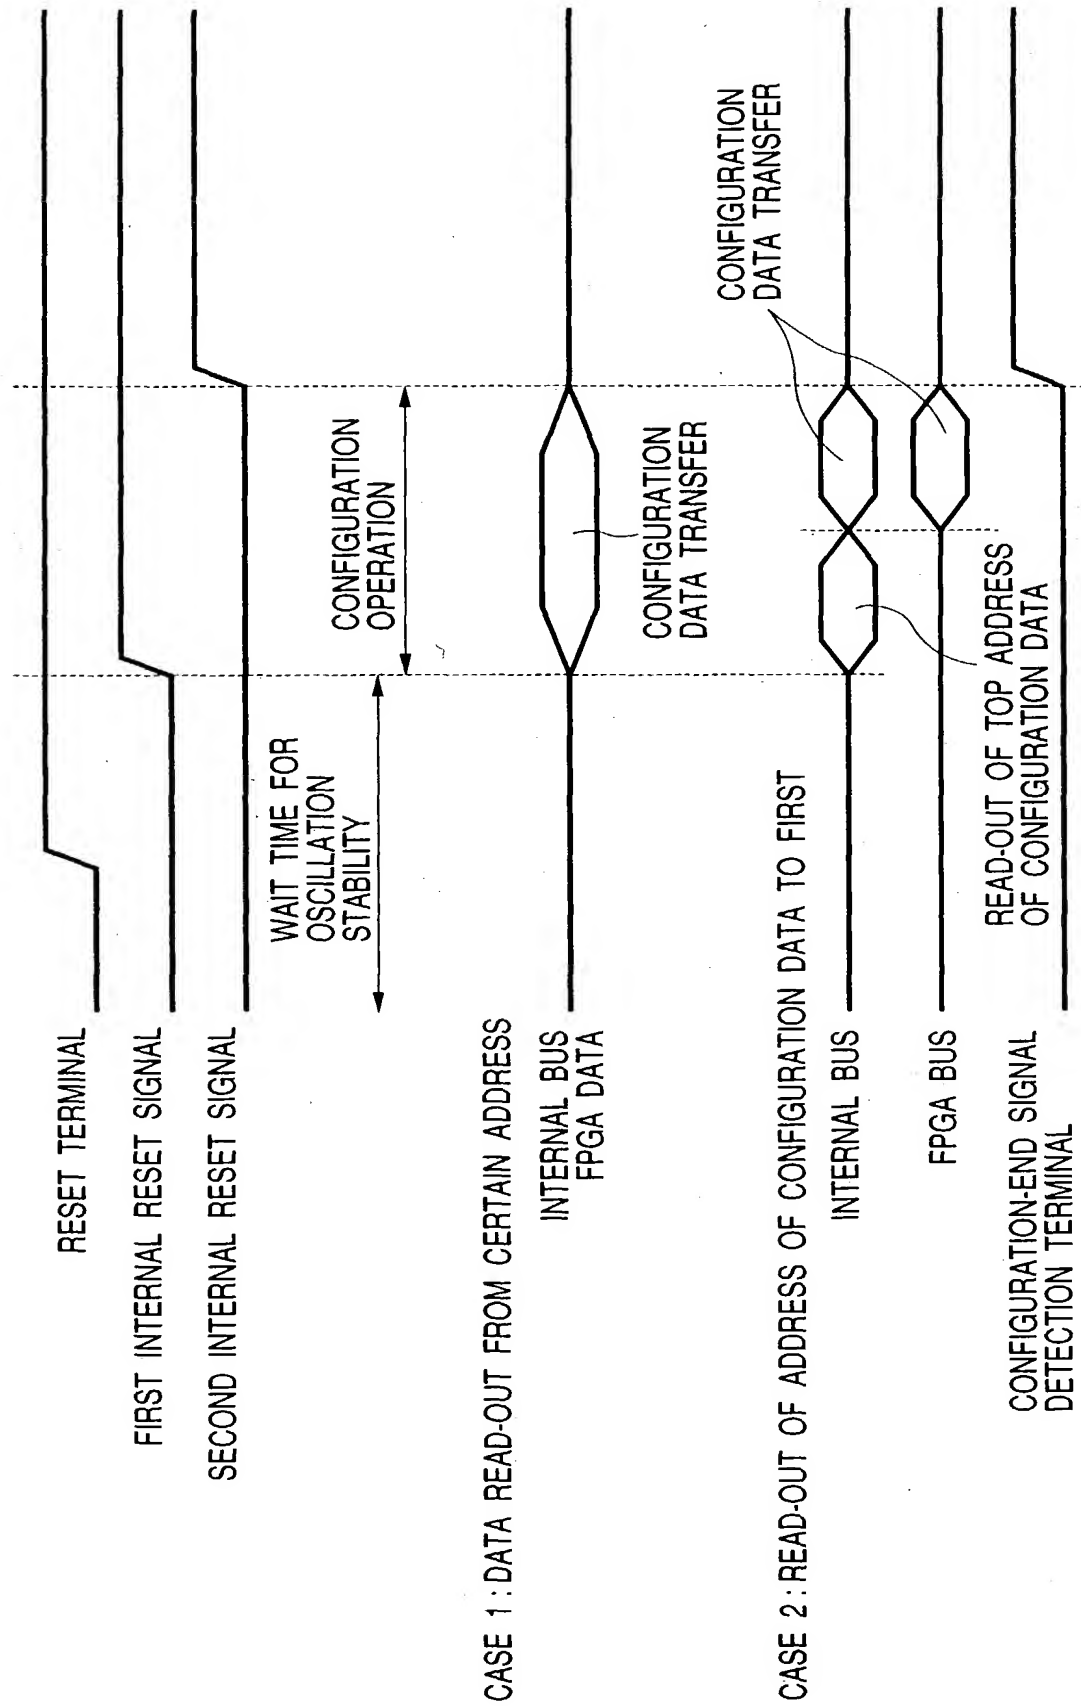


FIG. 4

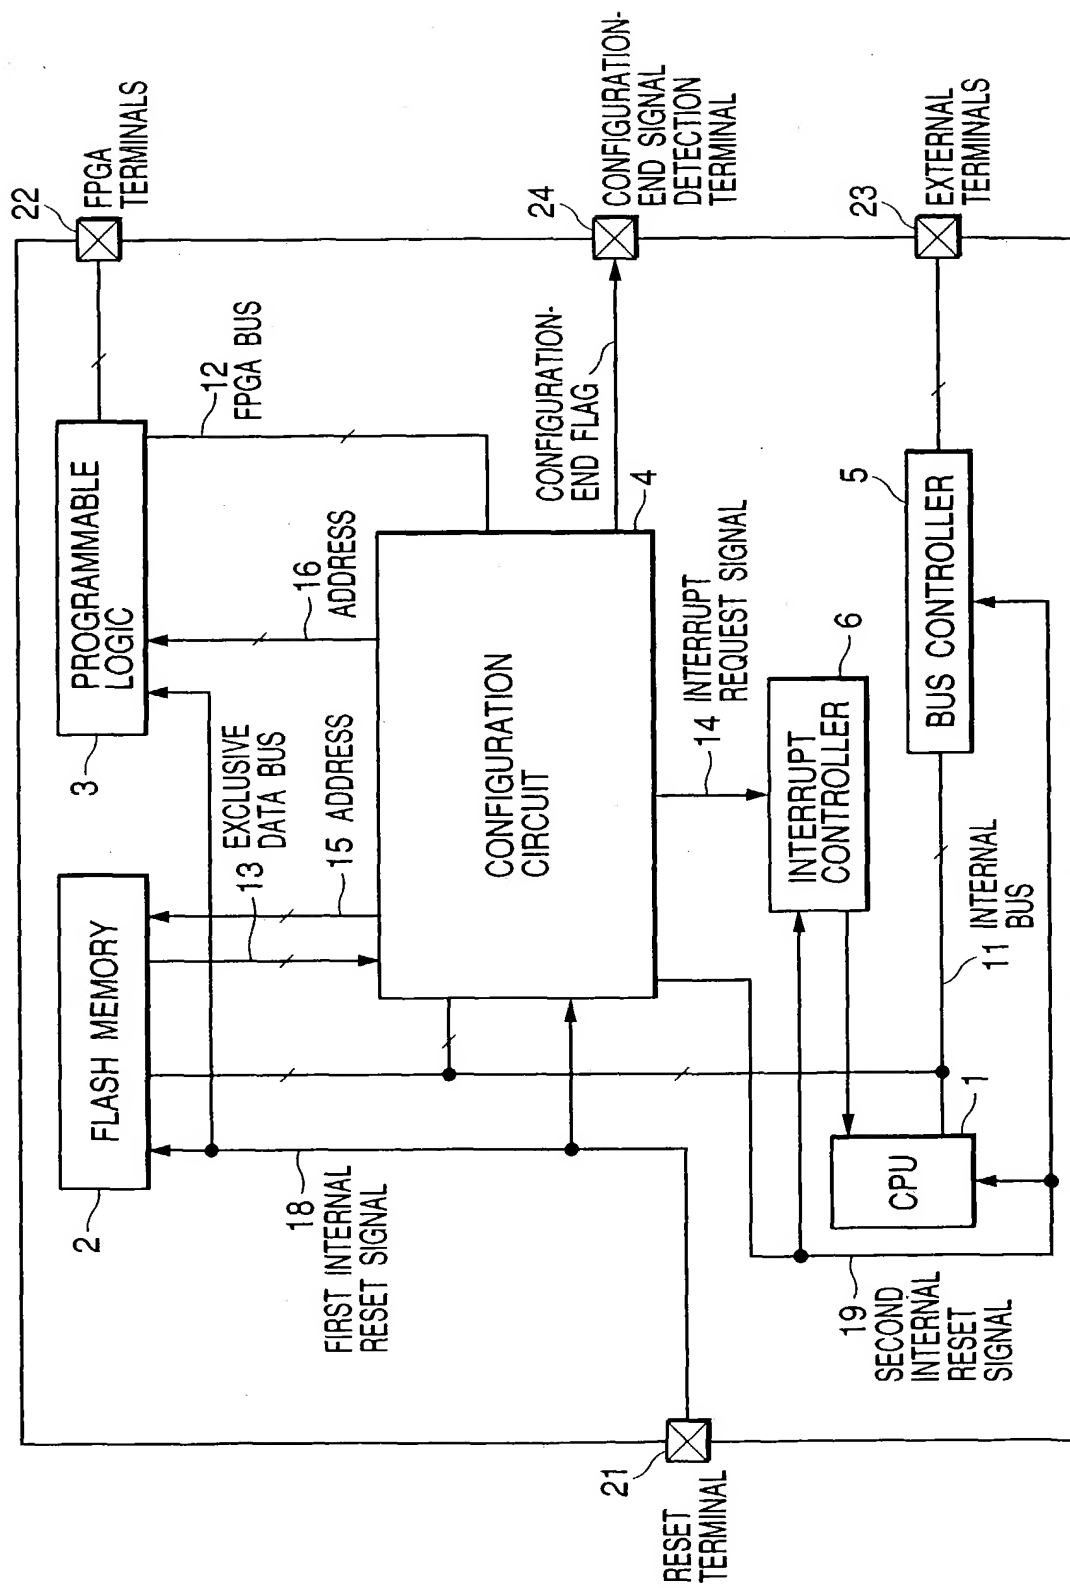


FIG. 5

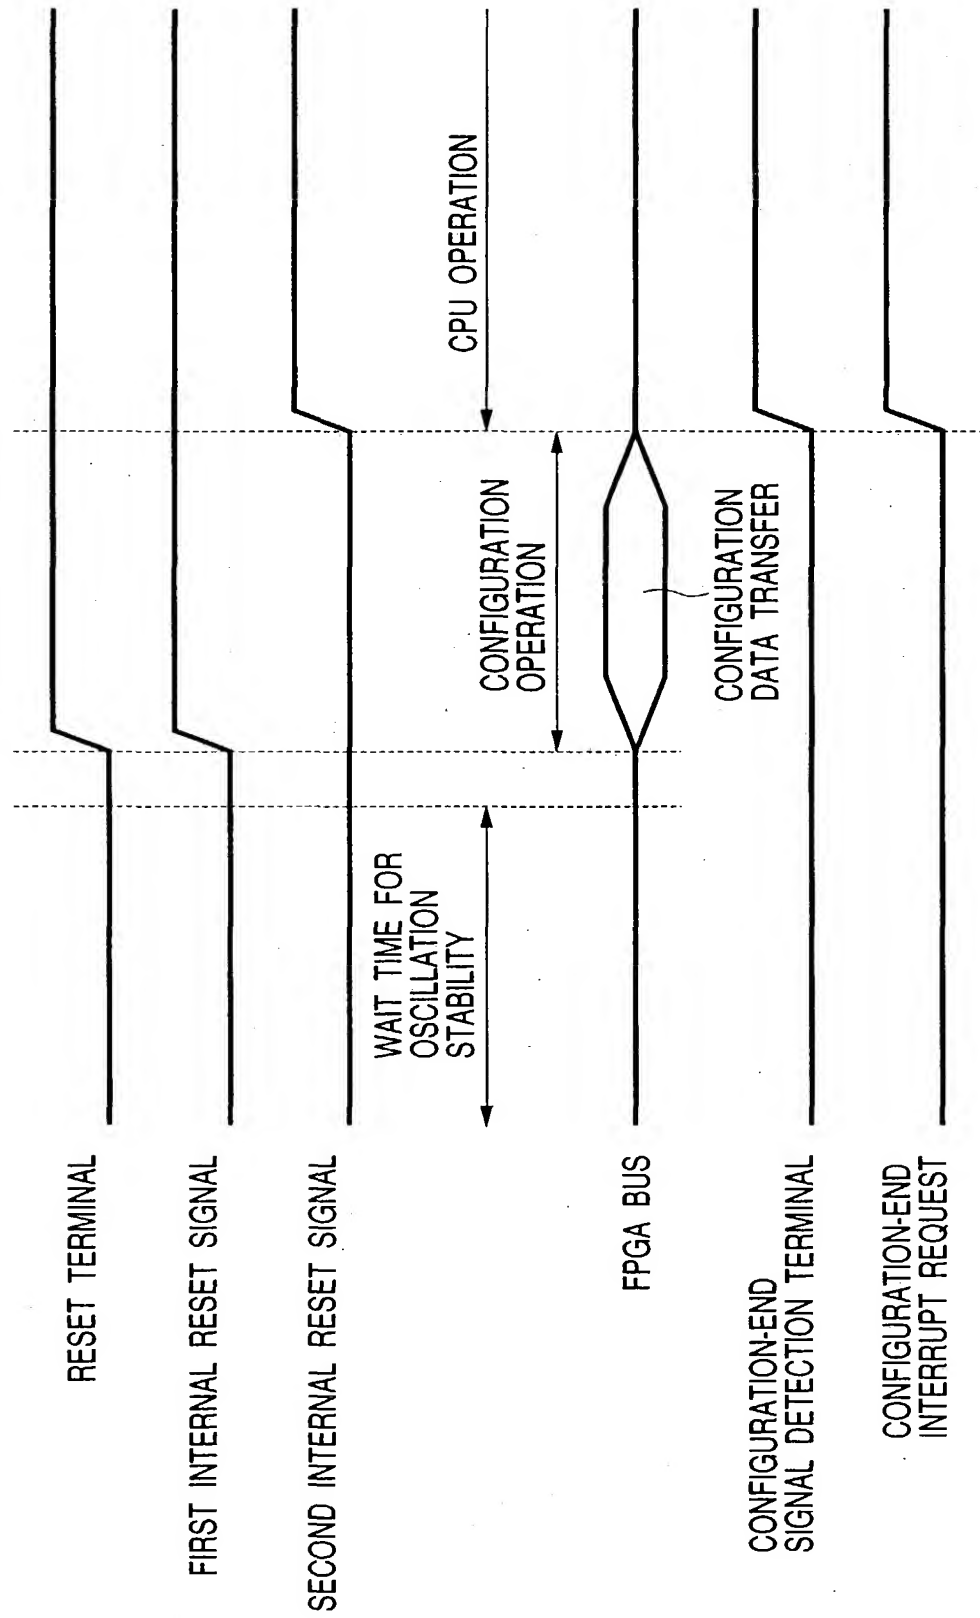


FIG. 6

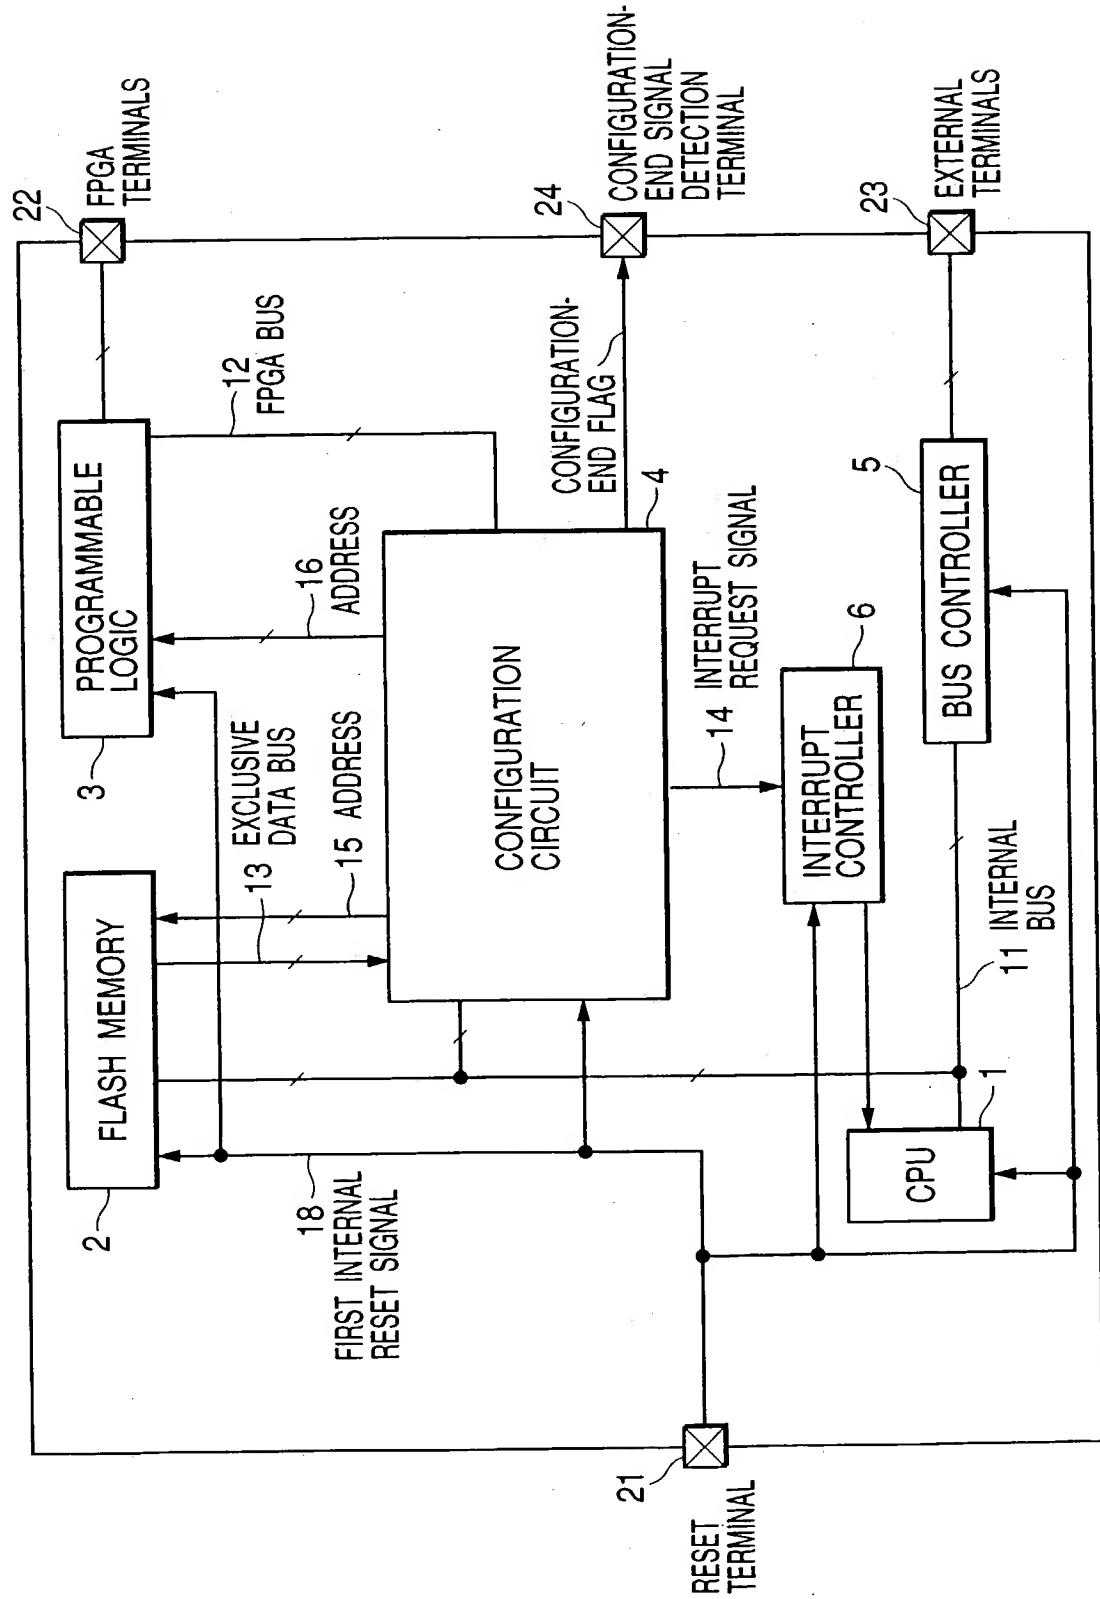
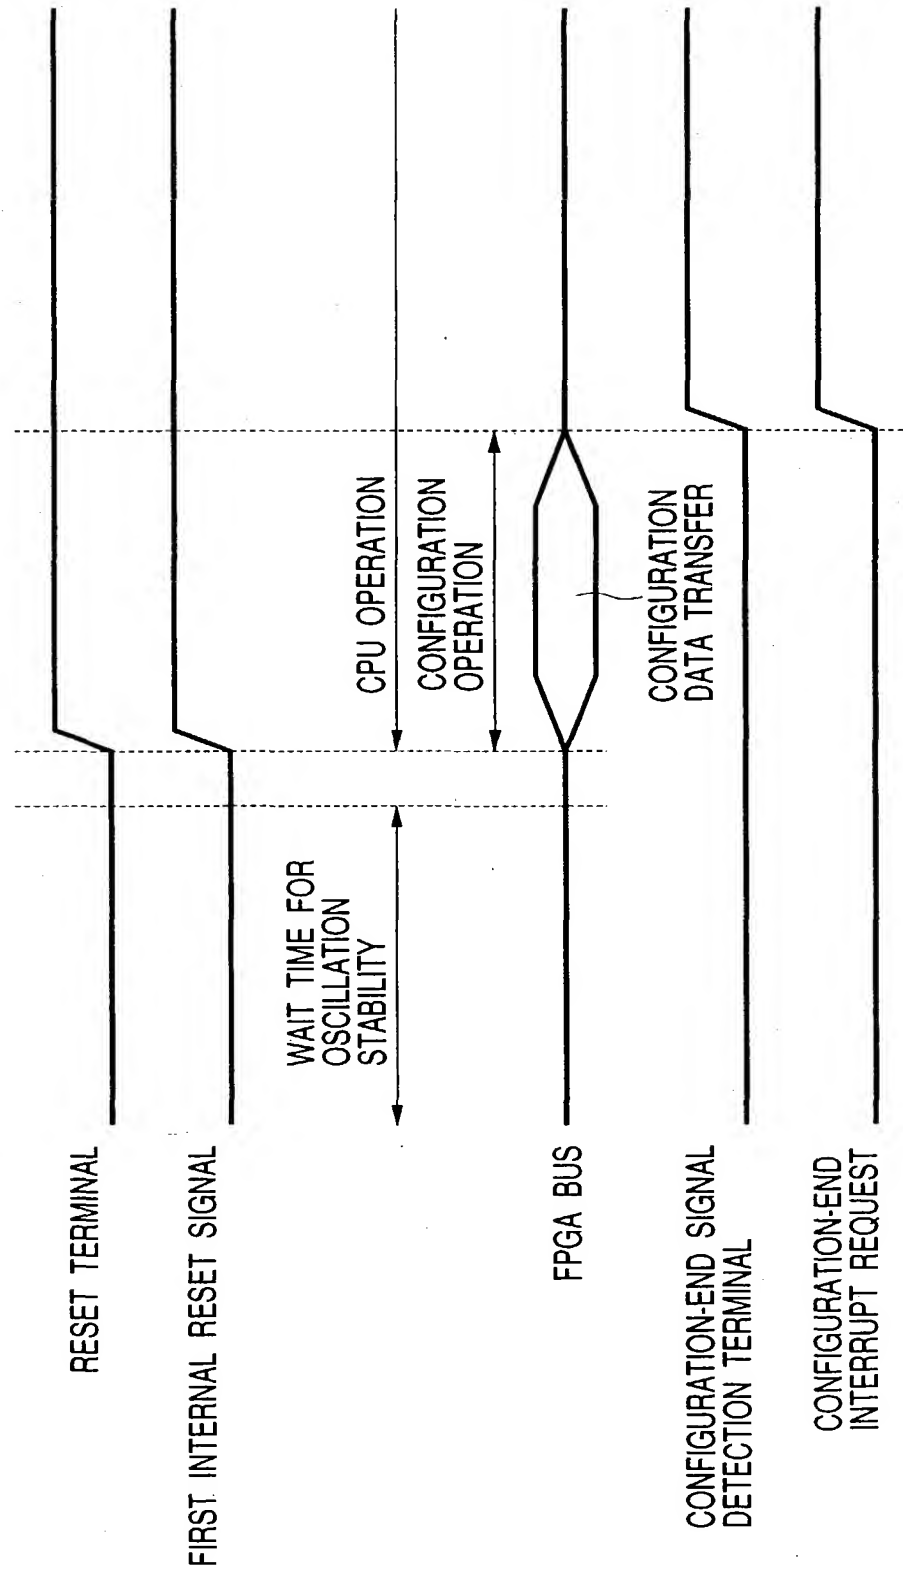


FIG. 7



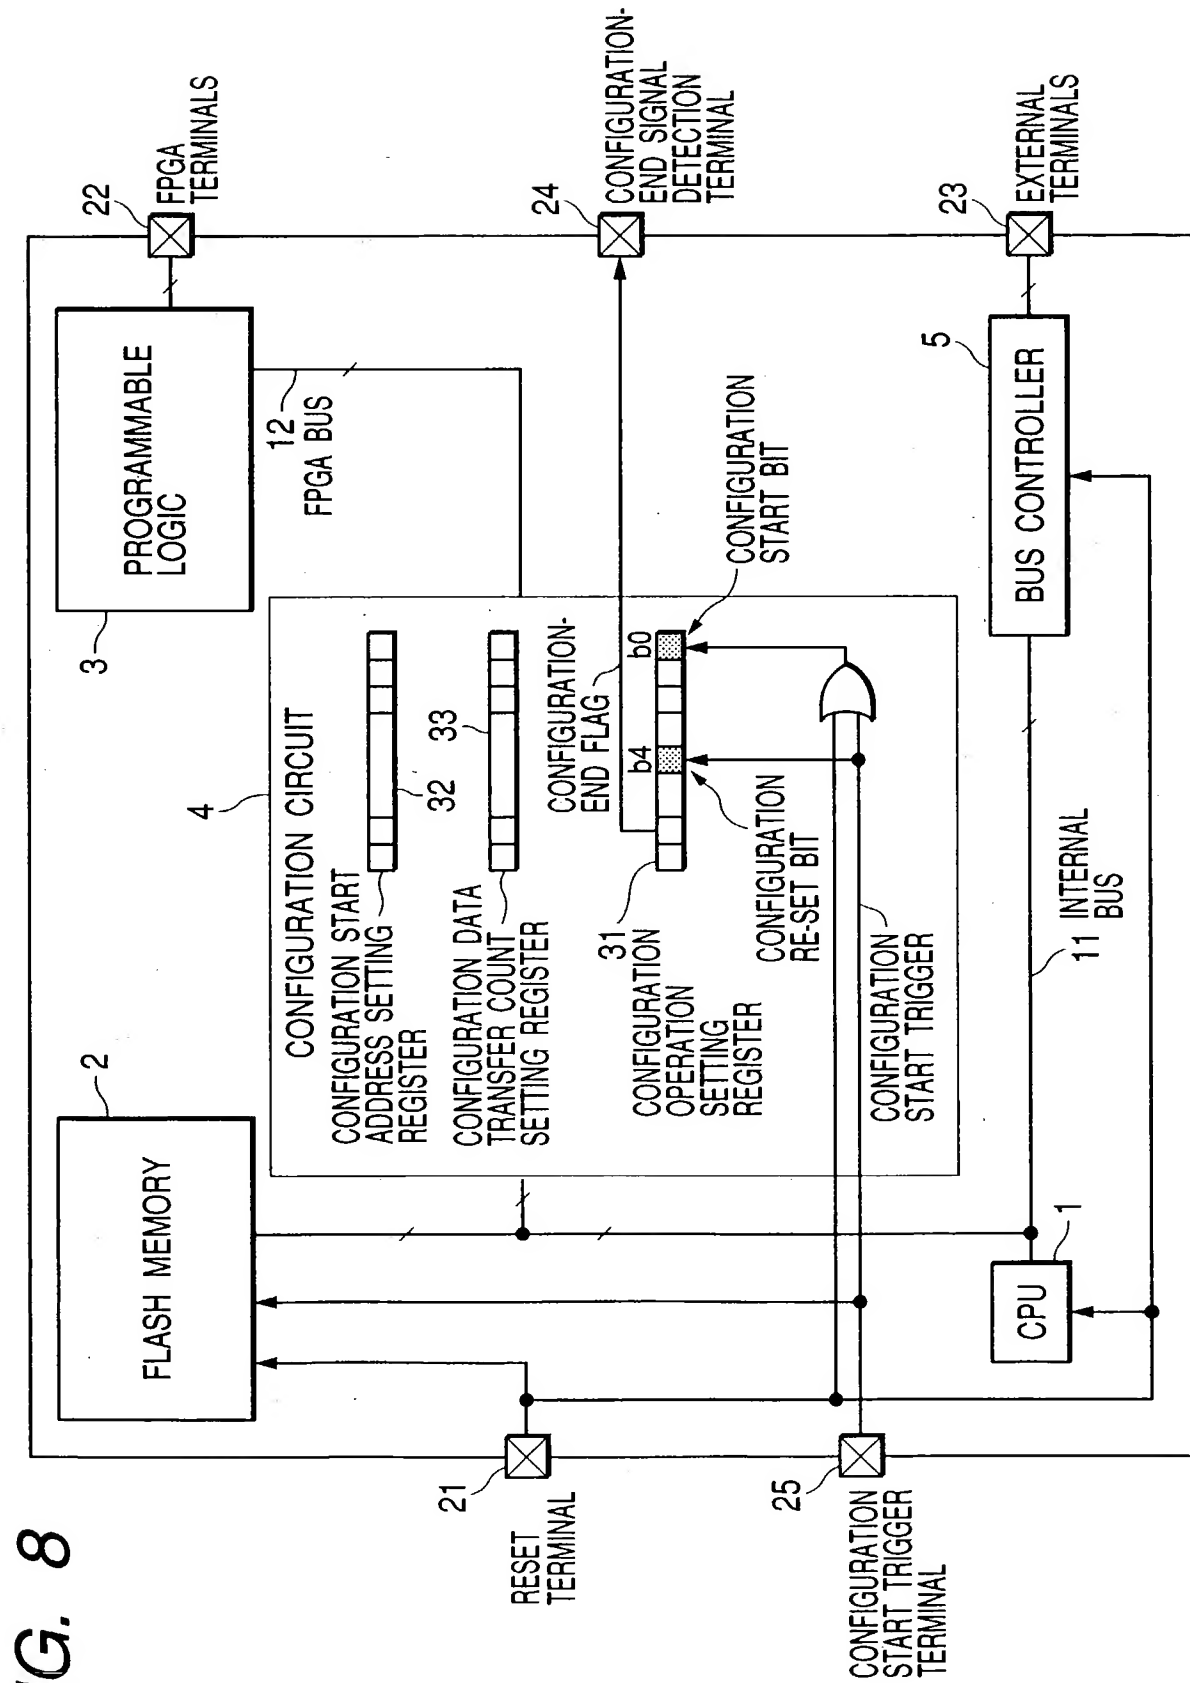


FIG. 9

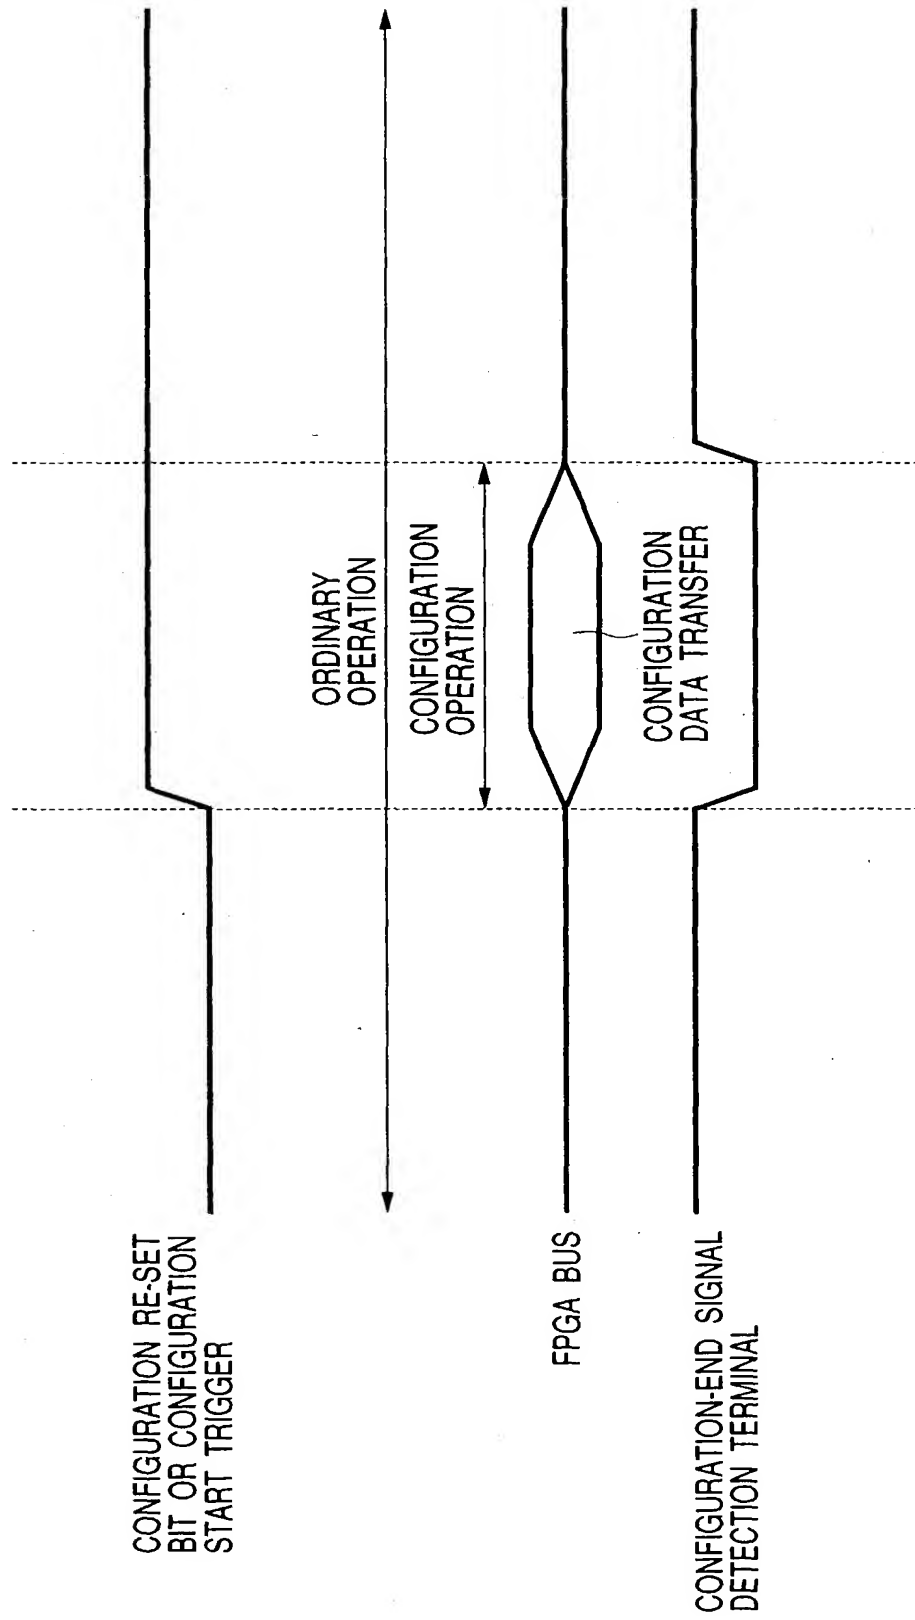


FIG. 10

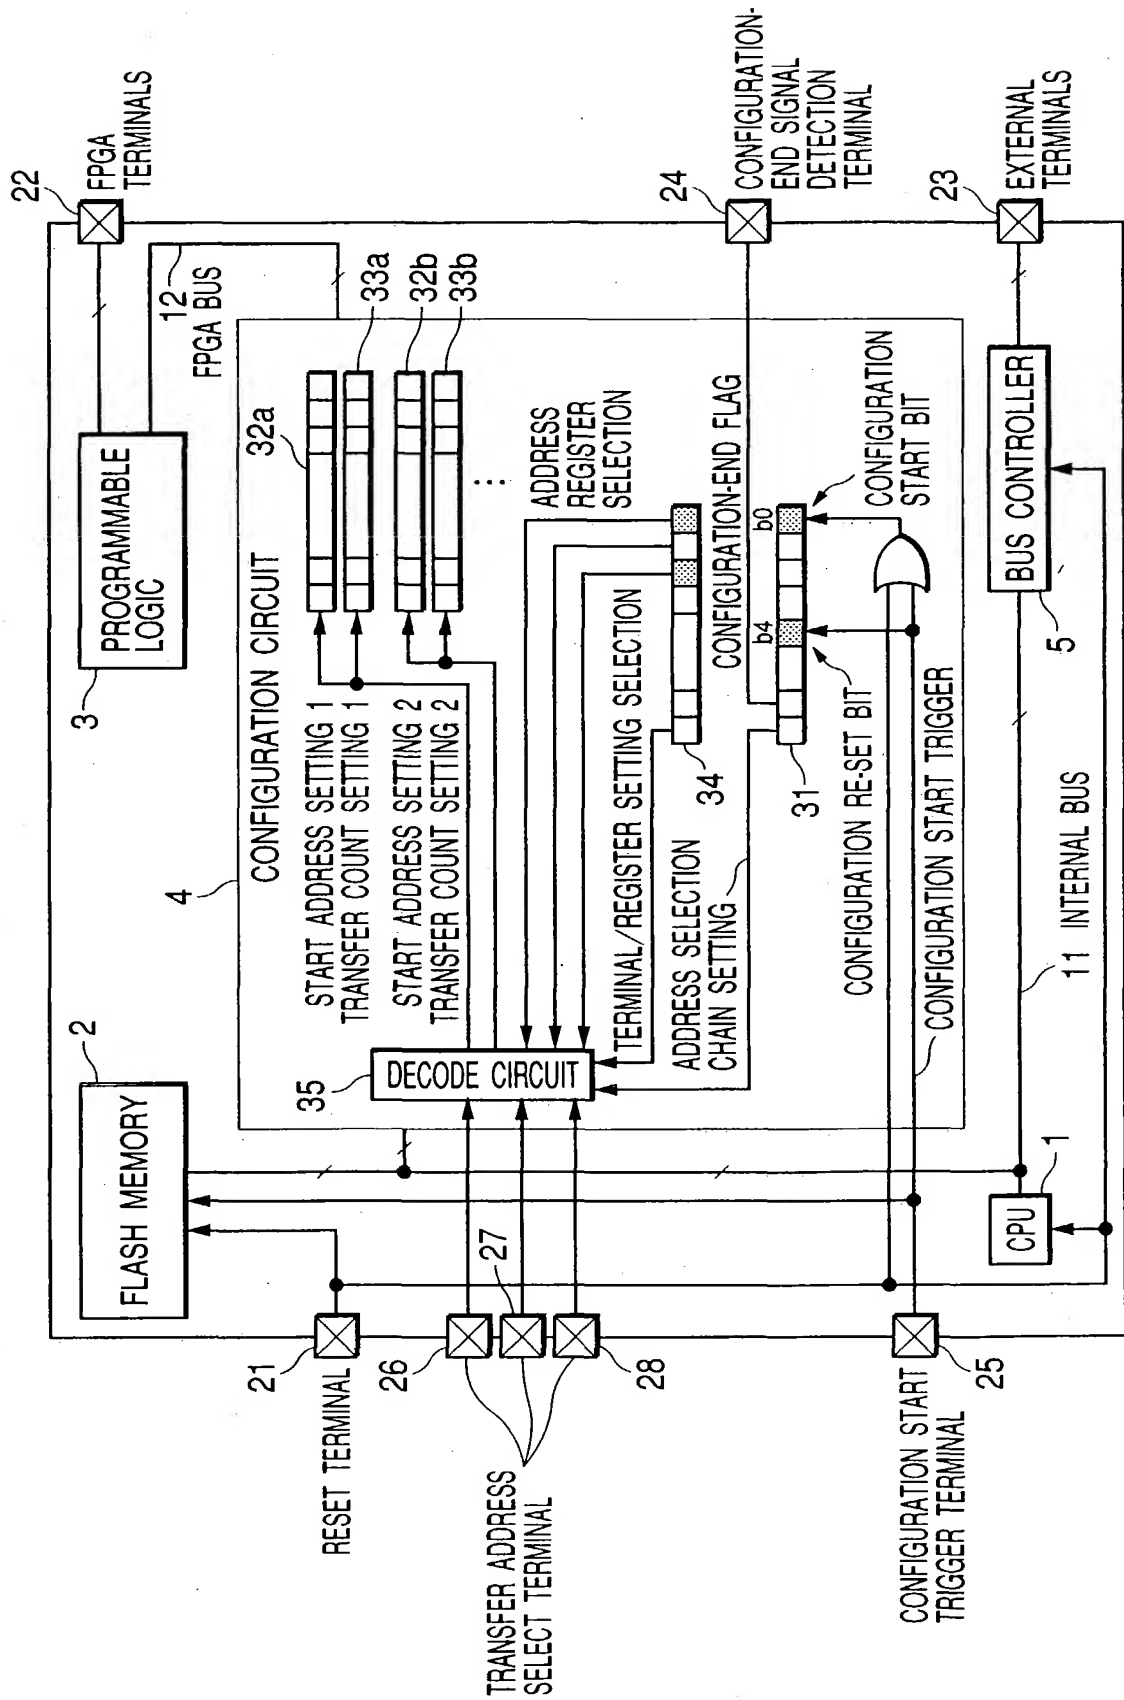


FIG. 12

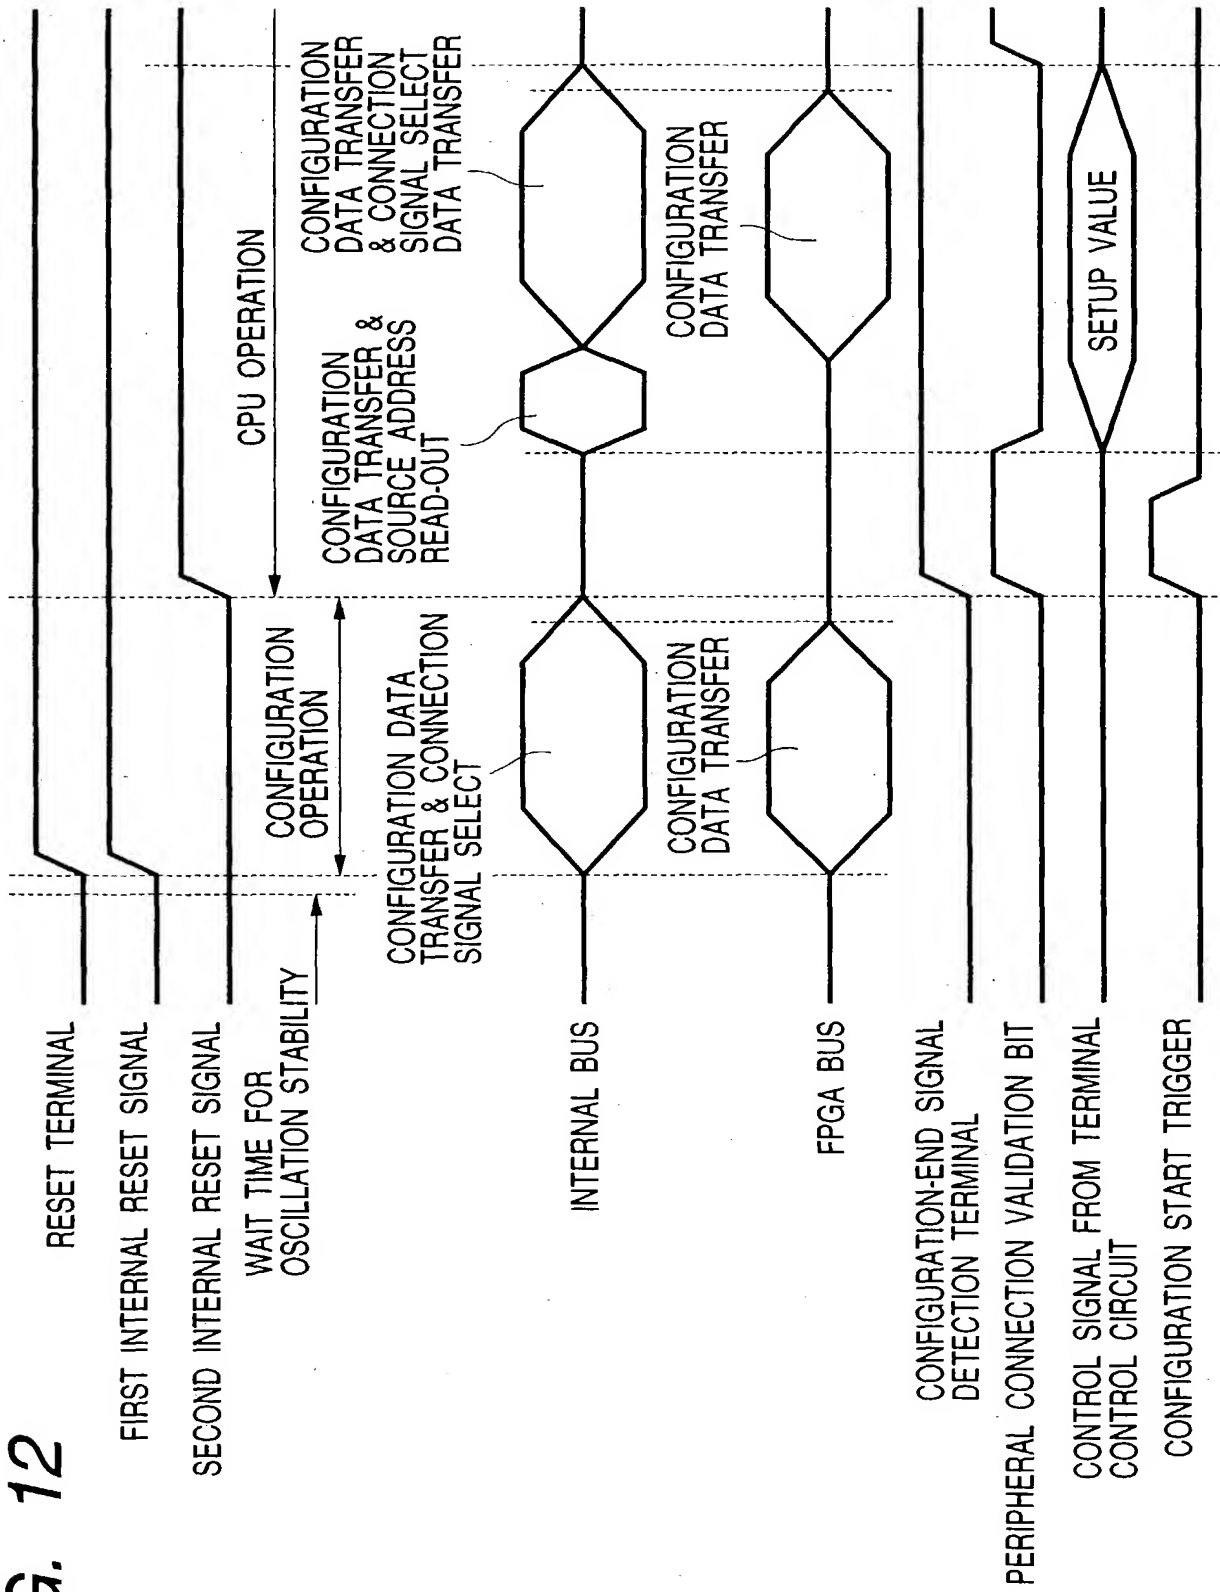


FIG. 14

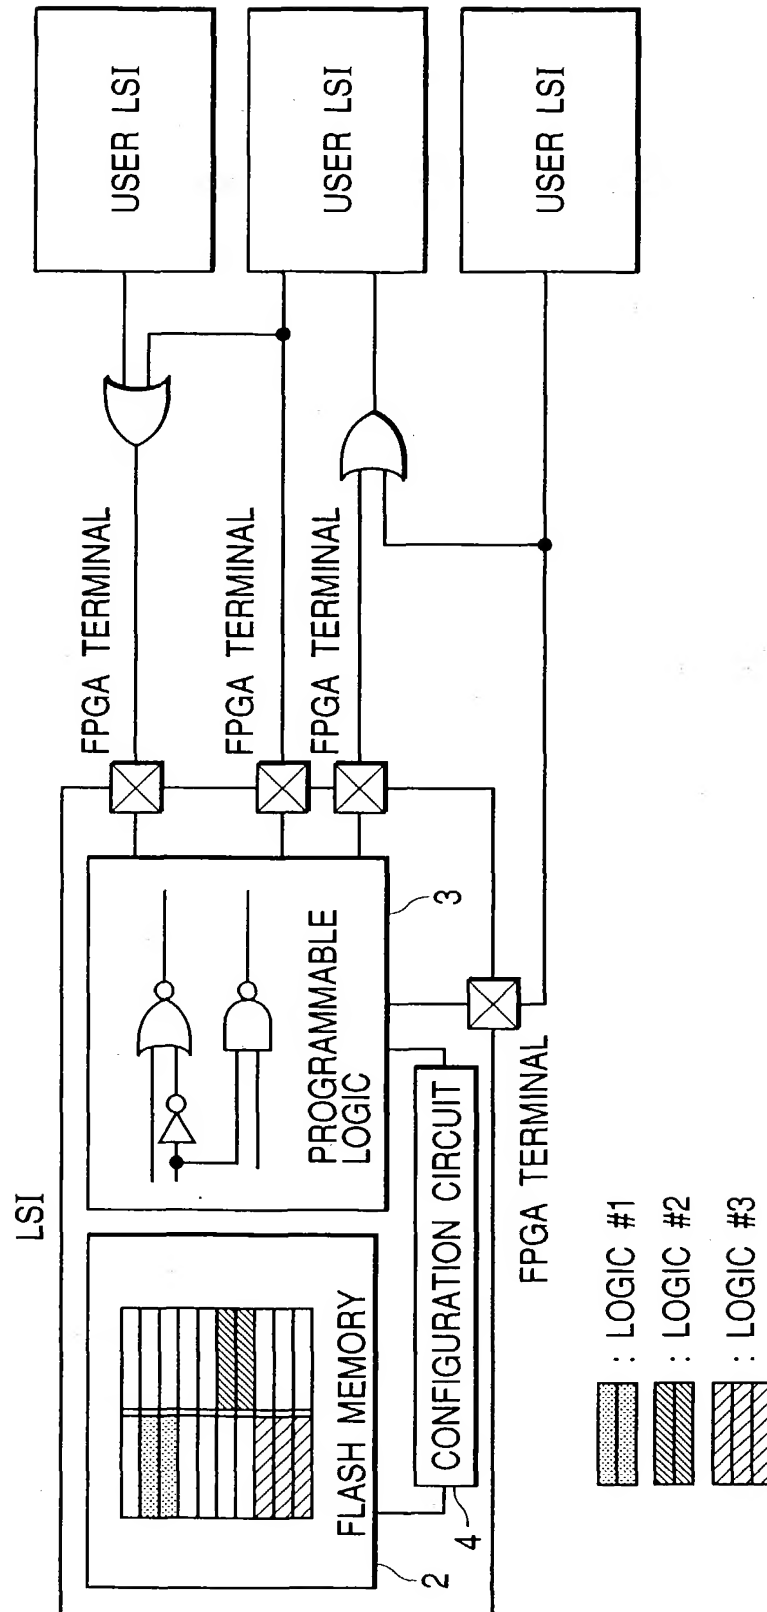


FIG. 15

